


ASSEMBLY AND INSTALLATION INSTRUCTIONS

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

NOTE : Before installing, consult local electrical codes for wiring and grounding requirement

1. Thread the fixture loop(C) onto the nipple(D) of shade(E) tightly.
2. Assemble the nipple(B) onto the cross bar, and lock it in place by hex nut(A).
3. Attach the cross bar to outlet box using 2 outlet box screws upwards.
4. Determine the length of the chain you need, using pliers to disconnect the extra chain and discard it away.
5. Hook the chain links onto both ends of chain, and hang the chain to the top loop and fixture loop(C).
6. Weave fixture wires and ground wire through the fixture loop(C), every other chain links, top nut, canopy, top loop and nipple(B) and then secure the top loop onto the nipple(B).
7. Make wire connections:
 - - - Attach ground wire to house ground wire using a wire nut(or attach them to the cross bar with a green ground screw).
 - - - Attach ribbed wire from light to white wire from power source with a wire nut.
 - - - Attach smooth wire from light to black wire from power source with a wire nut.
8. Tuck the wire connections neatly into the outlet box.
9. Attach the canopy to the ceiling, then secure with top nut.
10. Install bulb.(not included)(Please do not exceed the maximum capacity which is recommended on the fixture.)
11. Turn power on at fuse or circuit box.

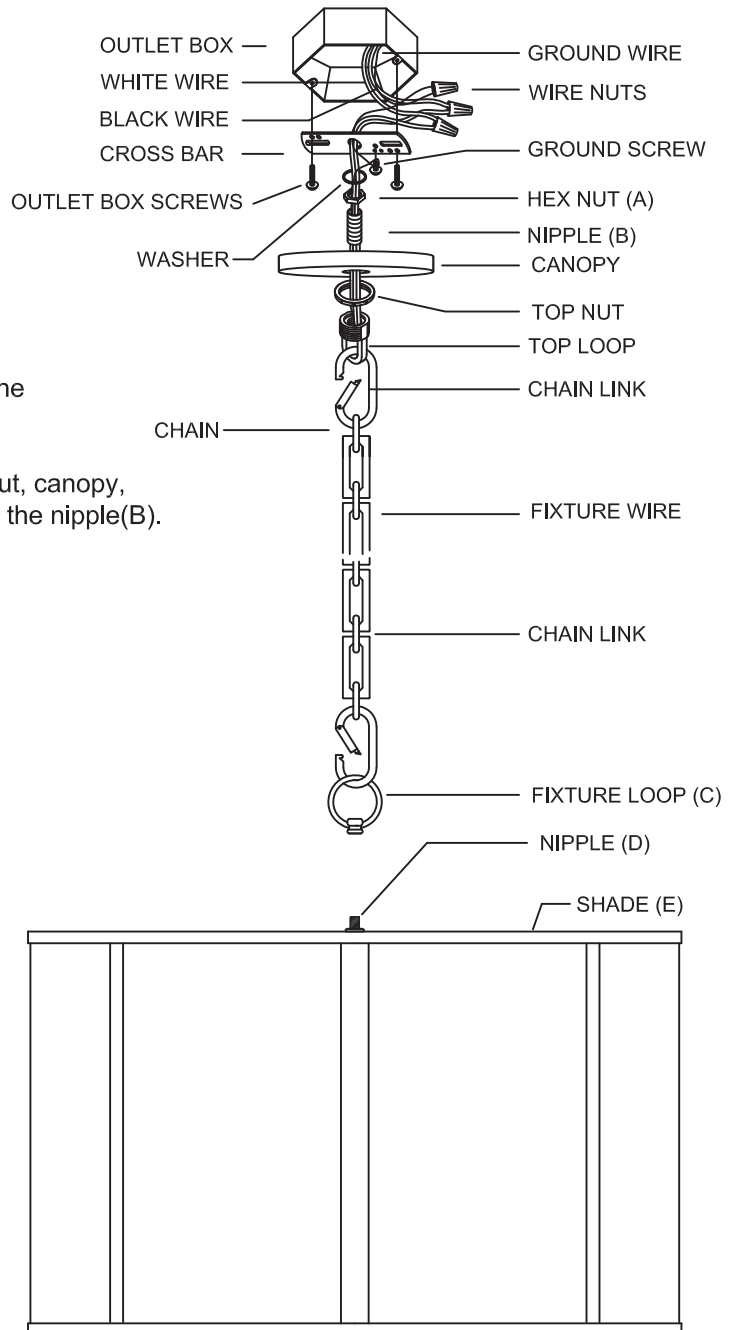

8228-4-XX
 # 8228-6-XX
 # 8229-4-XX
 # 8229-4-XXXX